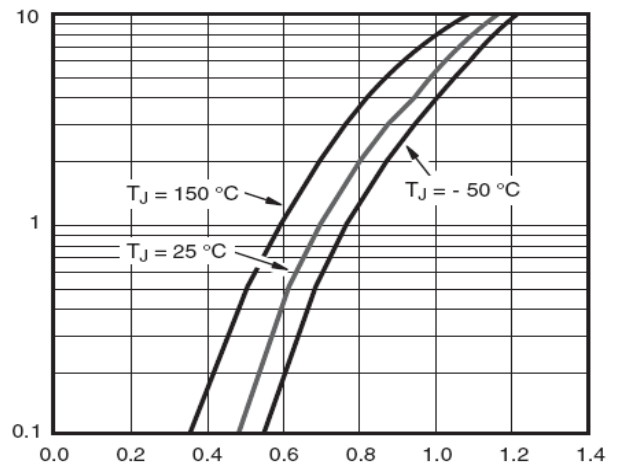
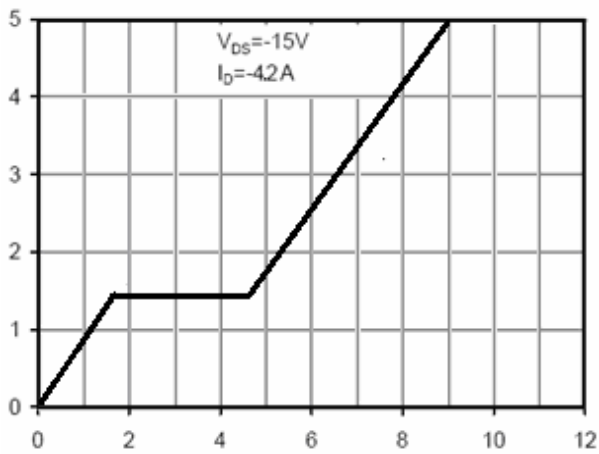
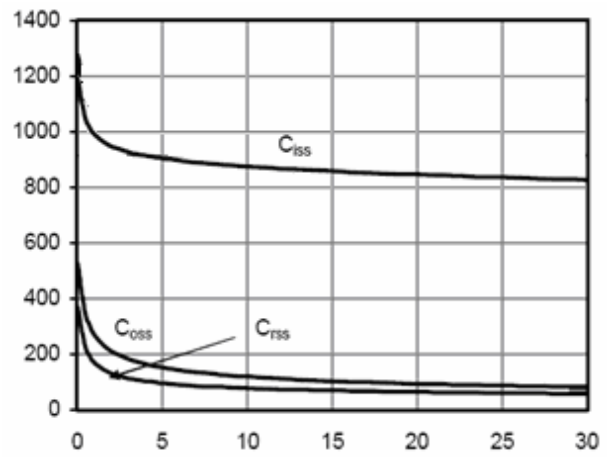
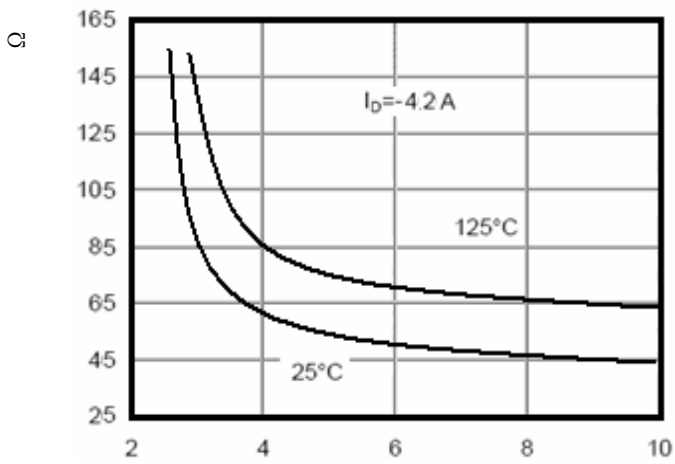
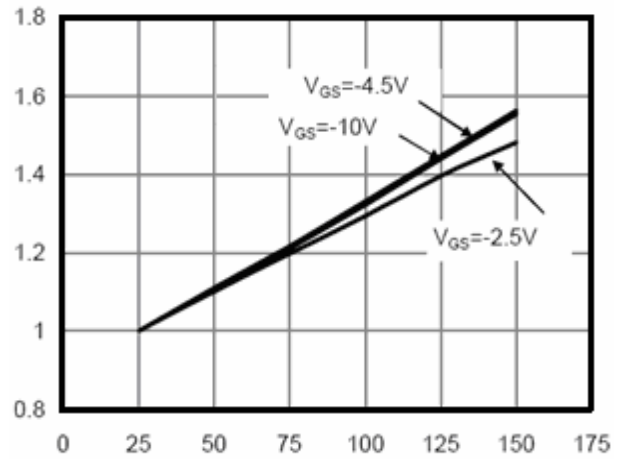
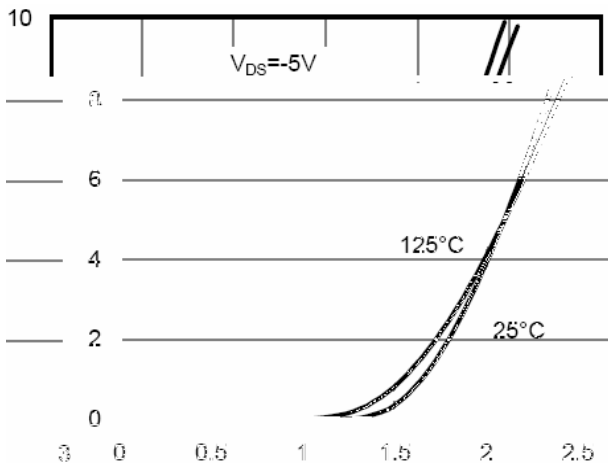


On Characteristics						
		μ				
						Ω
						Ω
						Ω
Dynamic Characteristics						
Switching Characteristics						
Drain-Source Diode Characteristics						

Notes:

- 1.
- 2.
3. $\leq \mu \leq$
- 4.



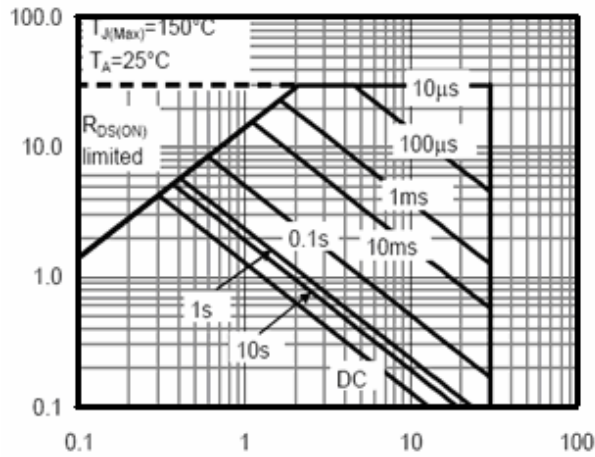


Figure 13 Safe Operation Area

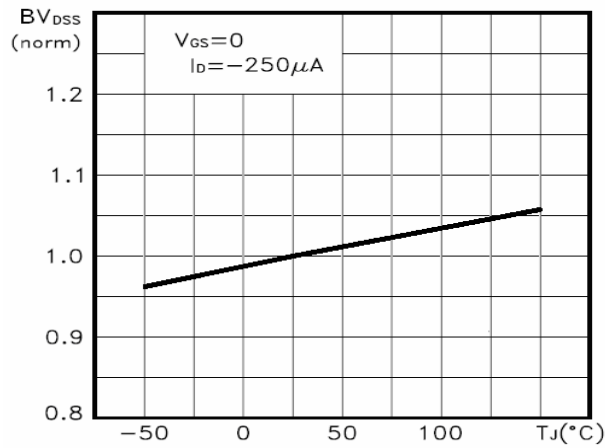


Figure 14 BV_{DSS} vs Junction Temperature


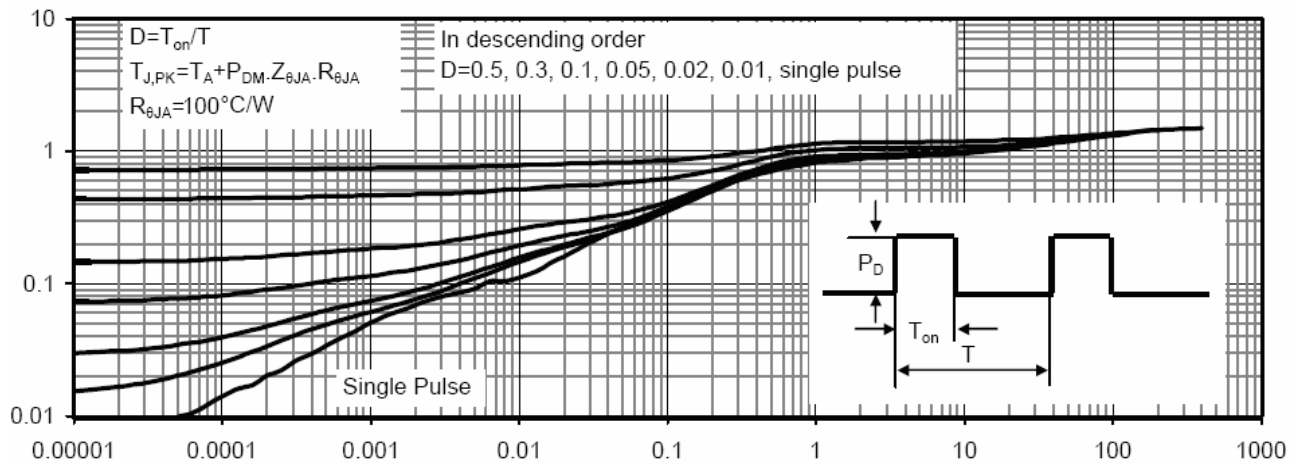


Figure 15 Normalized Maximum Transient Thermal Impedance

SOT-23 Package Information

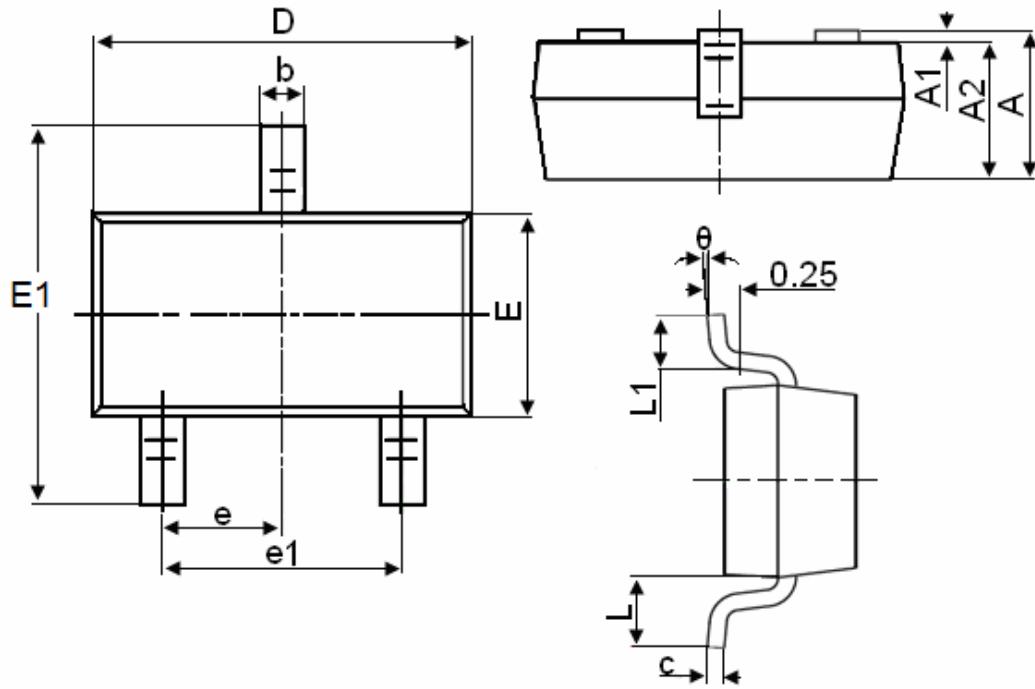

Symbol	Dimensions in Millimeters	
	MIN.	MAX.
θ		

Attention:

-
-
-
-
-
-
-
-